



OpenScape Business V1

How To
Setup OpenStage phones for myPortal for OpenStage

Version 1.0

Definitions

HowTo

A HowTo describes the configuration of an feature within the administration of the system. It addresses primarily trained administrators.

Tutorial

Within the tutorials procedures for installation, administration and operation of specific devices, applications or 3rd party systems, which are connected to the system, are described. The tutorial addresses primarily trained administrators.

Table of Contents

1	Prerequisites	4
2	SW Installation	4
3	Administration / Configuration	4
3.1	OpenScape Business Configuration	4
3.1.1	OpenScape Business with UC Smart	4
3.1.2	OpenScape Business with UC Suite	5
3.2	OpenStage 60/80 Configuration	5
4	Handling of myPortal for openStage	7
4.1	Application Start	7
4.2	Application Usage	10
4.3	Application Stop	11

Table of History

Date	Version	Changes
2013-10-30	1.0	Initial Creation

1 Prerequisites

Following prerequisites are required for myPortal for OpenStage.

- OpenScape Business installed and operating
- Embedded Web Server is enabled and operating
- UC Smart or UC Suite user is configured within OpenScape Business platform
- OpenStage device of the user is connected to OpenScape Business and operating.
- Actual Firmware (V2R0 or higher) is installed within OpenStage 60/80 HFA device

2 SW Installation

No application software needs to be installed on OpenStage 60/80 device for myPortal for OpenStage, as the myPortal for OpenStage application is integrated part of OpenScape Business.

3 Administration / Configuration


3.1 OpenScape Business Configuration

Access to the embedded Web Server of OpenScape Business has to be enabled. Administration of the Web Server access depends on the used UC solution within OpenScape Business.

3.1.1 OpenScape Business with UC Smart

Access to the Web Server via HTTP has to be enabled , as HTTPS is not supported by OpenStage phones. This can be done within Administration Portal by invoking the following configuration dialog:

→ Setup → UC Smart → Basic Settings

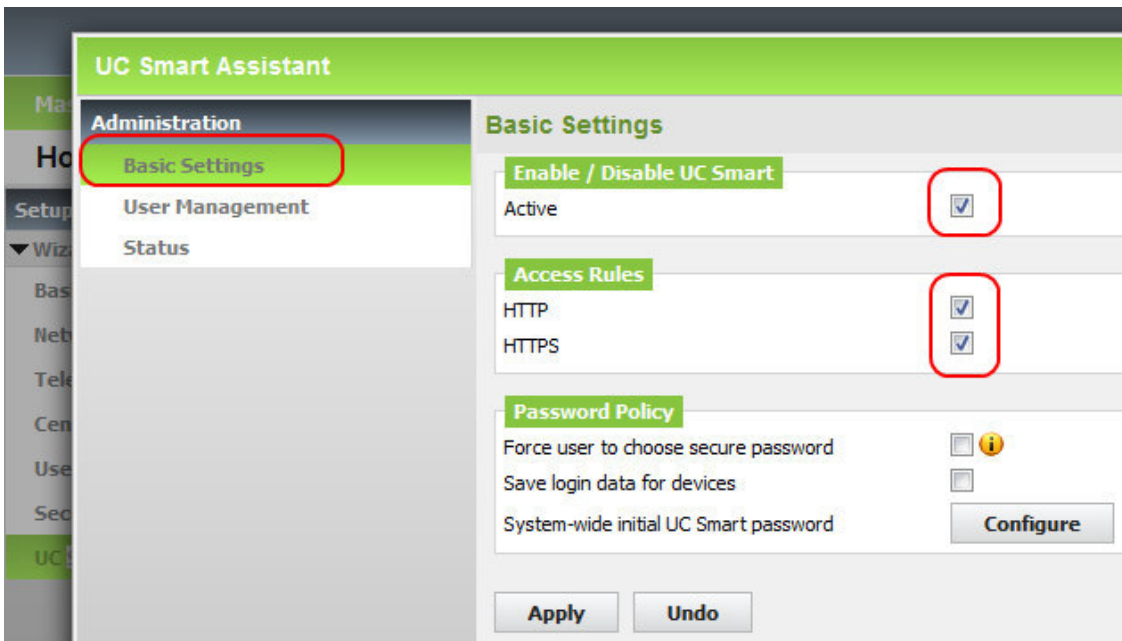


- Enable UC Smart
- Allow Access via HTTP and HTTPS
- Administrator or user has to set an individual password for the account

3.1.2 OpenScape Business with UC Suite

Access to the Web Server via HTTP has to be enabled, as HTTPS is not supported by OpenStage phones. This can be done within the Expert mode of the Administration Portal by invoking the following configuration dialog:

Telephony Server → WebSecurity → WebClients

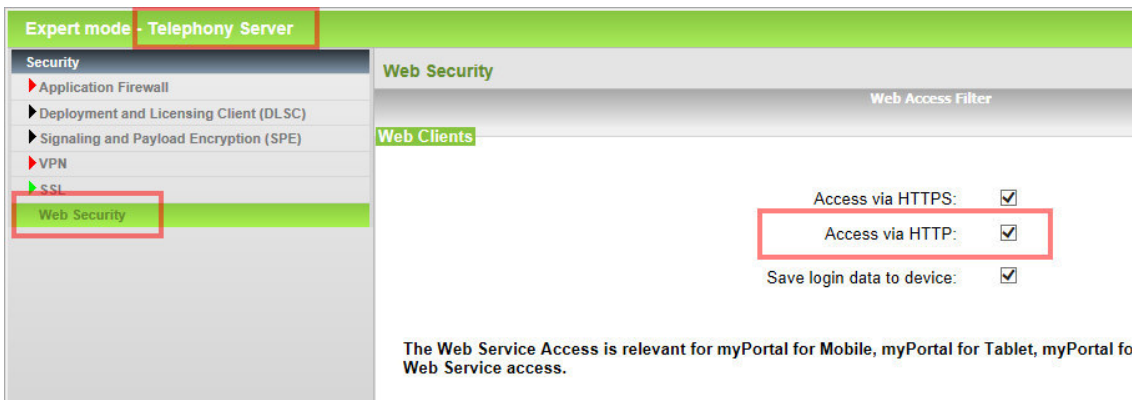

- Allow Access via HTTP and HTTPS

3.2 OpenStage 60/80 Configuration

The following steps have to be done to set up myPortal for openStage XML application on openStage 60/80 (HFA) device.

- Enter administration menu of the phone or use an Internet Browser and the Web based Management (WBM) function of the phone.
- Browse to Applications → XML applications → Add application

- Enter the following parameter
 - Display name myPortal
 - Application name: WS (always)
 - HTTP Server Address: IP address of OpenScao Business
 - HTTP Server Port Port for the WebServices (default: 8801)
 - Protocol Protocol type (default: http)
 - Program name on Server HiWebSP/os6080 (always)
 - Use Proxy no (depending on environment)
 - XML Trace enabled no
 - Number of Tabs 0
- Store the setting by using the “Save and Store” or “Submit” function

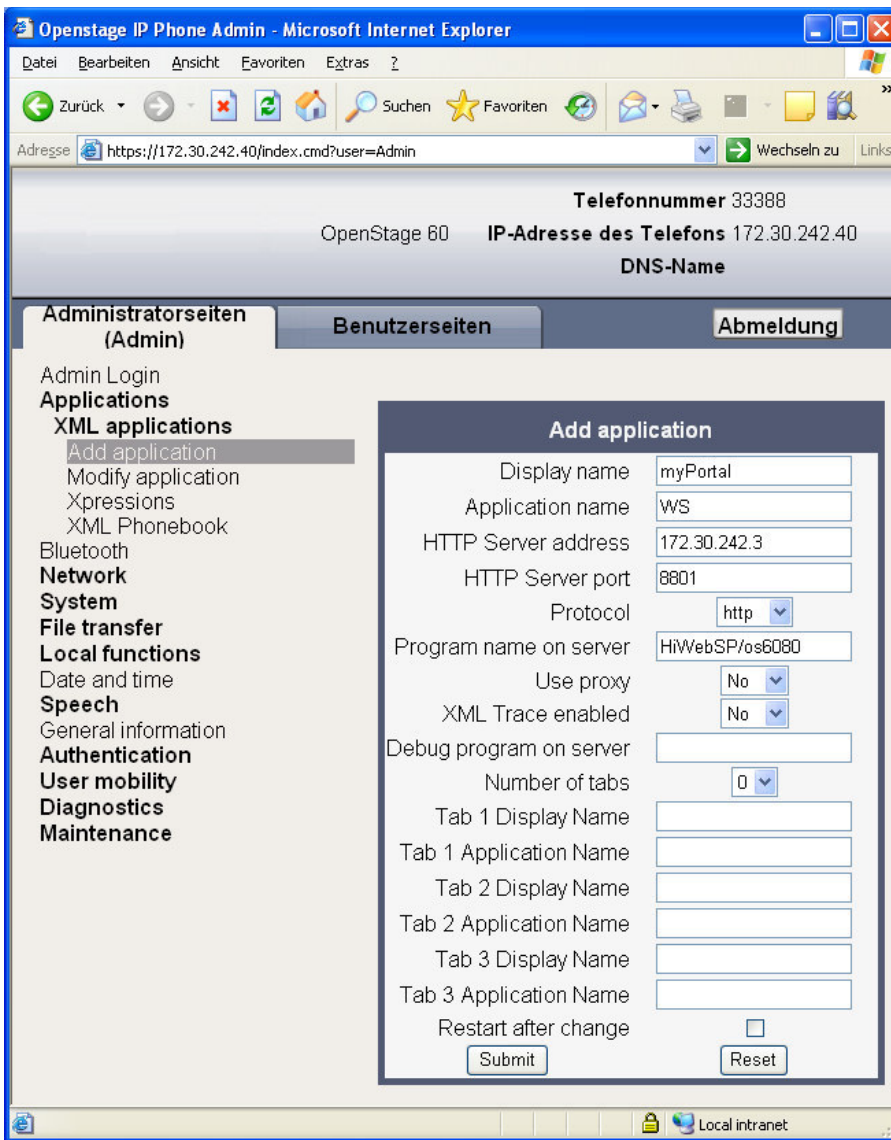


Figure 1 Example myPortal for OpenStage Setup (WBM)

4 Handling of myPortal for openStage

4.1 Application Start


Select "Application" within the application menu by pressing the applications menu key of the phone

Select myPortal within the list of available application using the TouchGuide of the phone





Start login procedure of the application by pressing the OK key of the TouchGuide

myPortal application starts now and requests a password for login

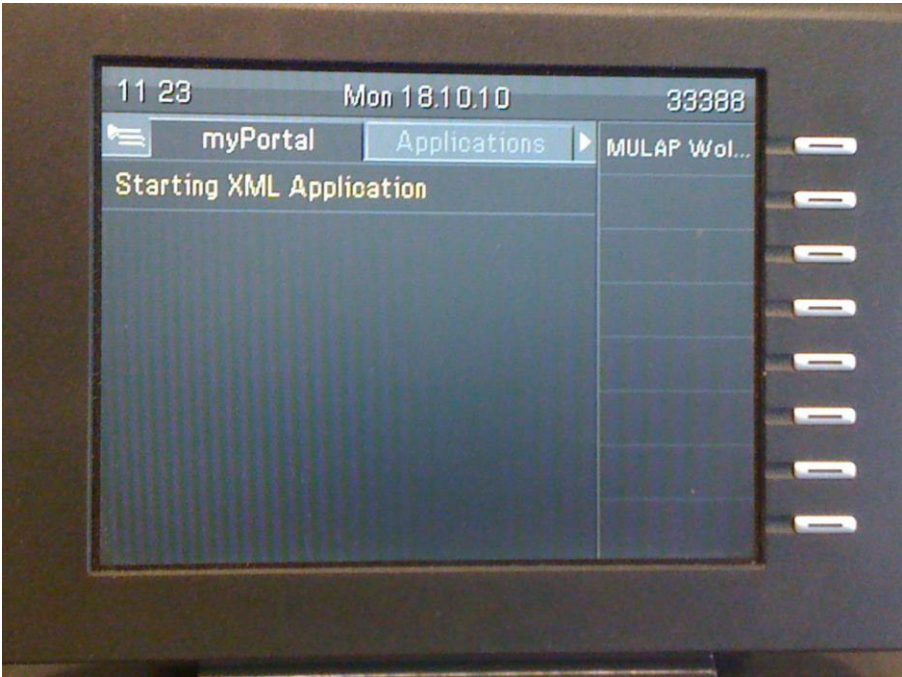


Enter the password using the TouchGuide functions

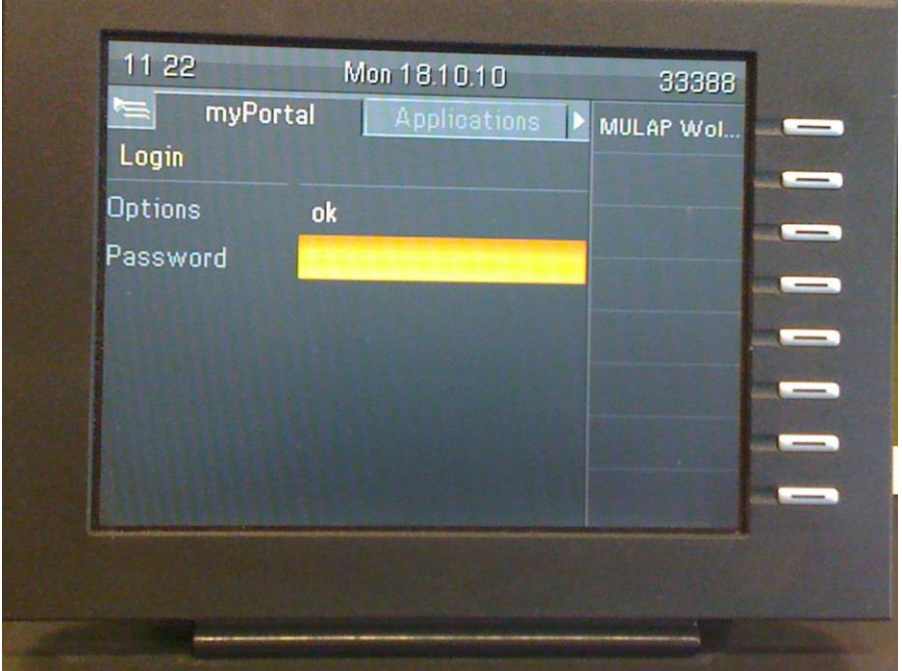


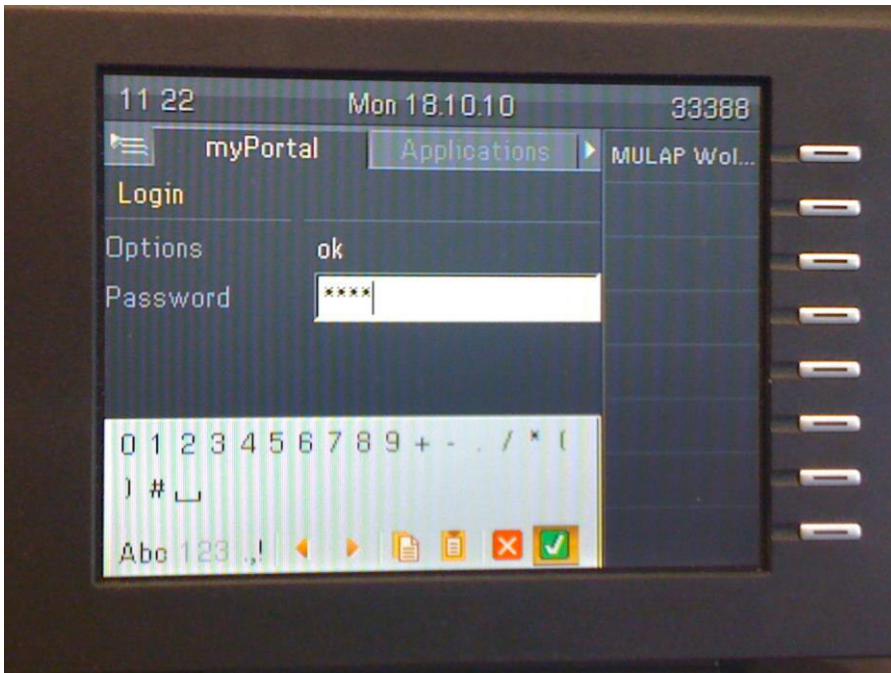

After password has been entered select ok option within the menu and press the OK key of the TouchGuide.

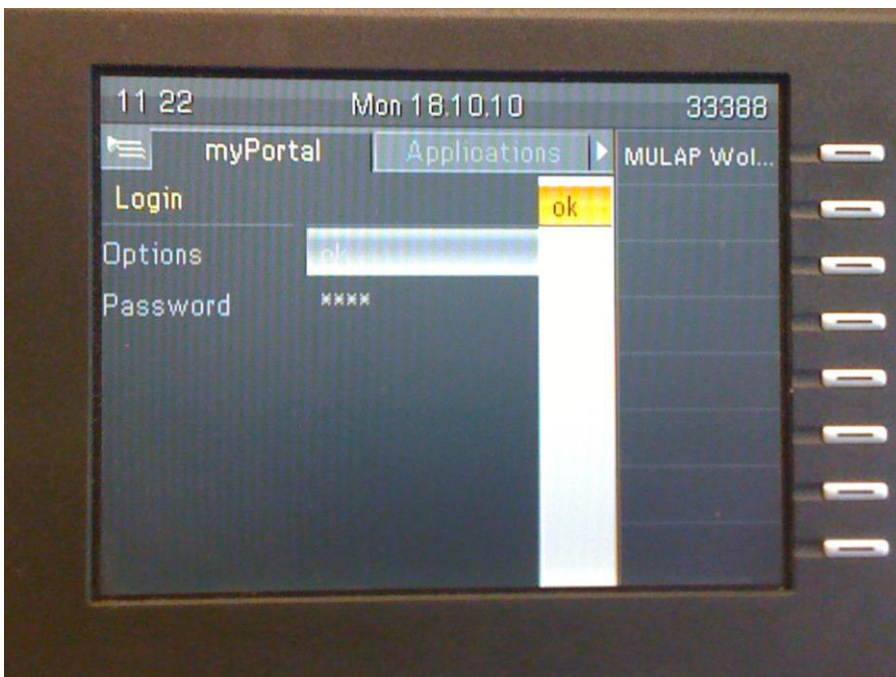


If password is accepted the main menu of the application is displayed. You can browse through the main menu and choose the desired function using the TouchGuide functions.

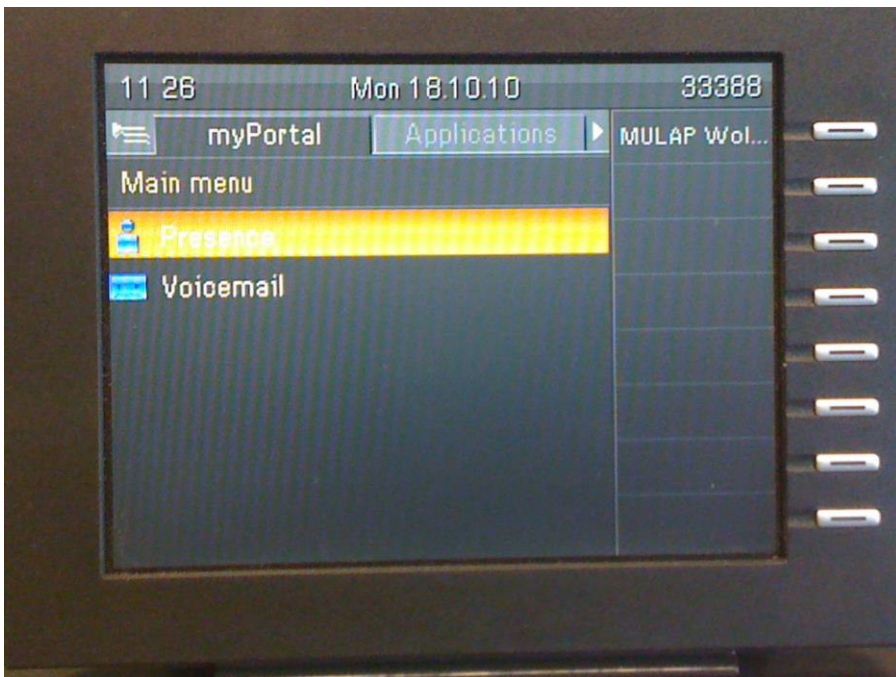

Remark: The voicemail function shown here is only available in combination with UC Suite.

4.2 Application Usage


The use of my Portal for openStage functions is intuitive. Once started, my Portal for open Stage is active until it is stopped manually. In case a phone call is initiated or alerting or other functions of the phones are used, application is put into background and is no longer displayed.

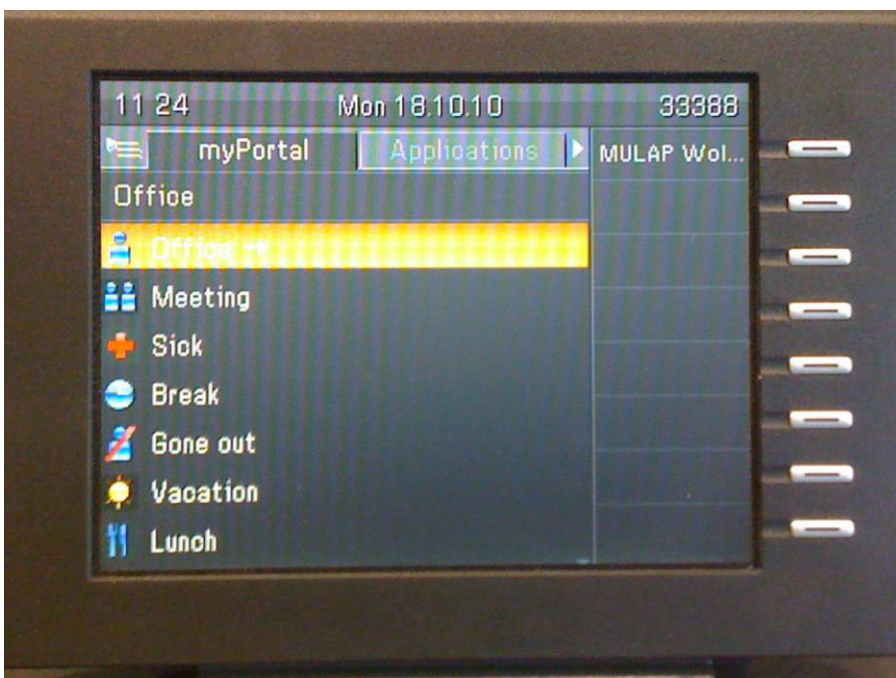

To retrieve it from background, the myPortal application has to be selected again by pressing the application menu key of the device.

4.3 Application Stop

Browse within the application menu using the application menu key and choose the myPortal application. Press the → key of the TouchGuide, select Stop and press the OK key of the TouchGuide.

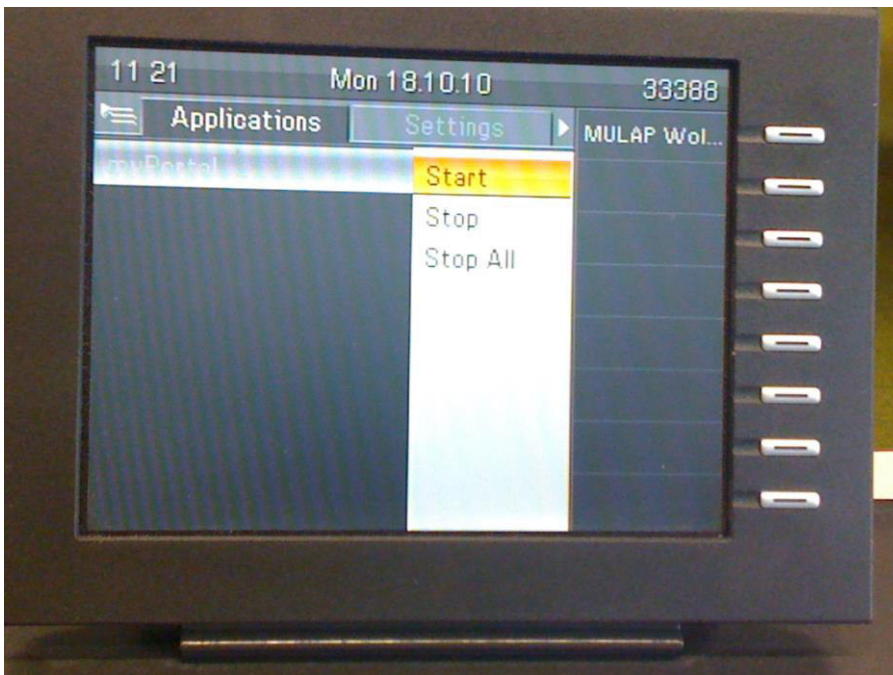

About Unify

Unify is one of the world's leading communications software and services firms, providing integrated communications solutions for approximately 75 percent of the Fortune Global 500. Our solutions unify multiple networks, devices and applications into one easy-to-use platform that allows teams to engage in rich and meaningful conversations. The result is a transformation of how the enterprise communicates and collaborates that amplifies collective effort, energizes the business, and enhances business performance. Unify has a strong heritage of product reliability, innovation, open standards and security.

Unify.com

Copyright © Unify Software and Solutions GmbH & Co. KG 2015
Mies-van-der-Rohe-Str. 6, 80807 Munich/Germany
All rights reserved.

The information provided in this document contains merely general descriptions or characteristics of performance which in case of actual use do not always apply as described or which may change as a result of further development of the products. An obligation to provide the respective characteristics shall only exist if expressly agreed in the terms of contract.

Availability and technical specifications are subject to change without notice.

Unify, OpenScape, OpenStage and HiPath are registered trademarks of Unify Software and Solutions GmbH & Co. KG. All other company, brand, product and service names are trademarks or registered trademarks of their respective holders.

UNIFY Harmonize
your enterprise