



# OpenScape Office

# HowTo

We are now **Unify**.

This document references our previous company name; all other content is still valid and correct. For further information, please visit [unify.com](https://unify.com)



# OpenScape Office V3

How To  
Setup OpenScape Office demo software

Version 1.0

# OpenScape Office LX V3 Demo Software

Showing the most complete UCC solution  
for SME **LIVE** to Customers

**How to Set Up the Demo  
in 5 Steps**



# OpenScape Office LX V3 Demo Software

## What do I need?

SIEMENS




1

Windows PC  
minimum dual core 2,4 GHz, 4 GB RAM



2

Two OpenStage HFA phones  
with power supply and LAN cables

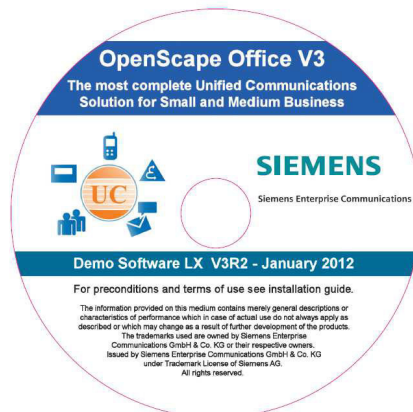


3

Demo DVD OpenScape Office LX

## Step 1

## Prepare your PC

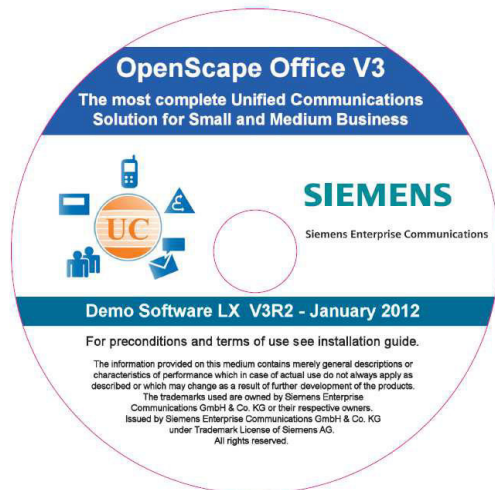

- ▶ Download free VMware Player V4.0 from Internet after registration and install it at your PC


<http://downloads.vmware.com>

- ▶ Extract virtual machine **Demo OSO LX V3R2.ZIP** from DVD to a folder at your PC

## Step 2

### Connect Devices


- ▶ Disconnect PC from wired and wireless networks \*)
- ▶ Connect phones to **LAN** and **Power**

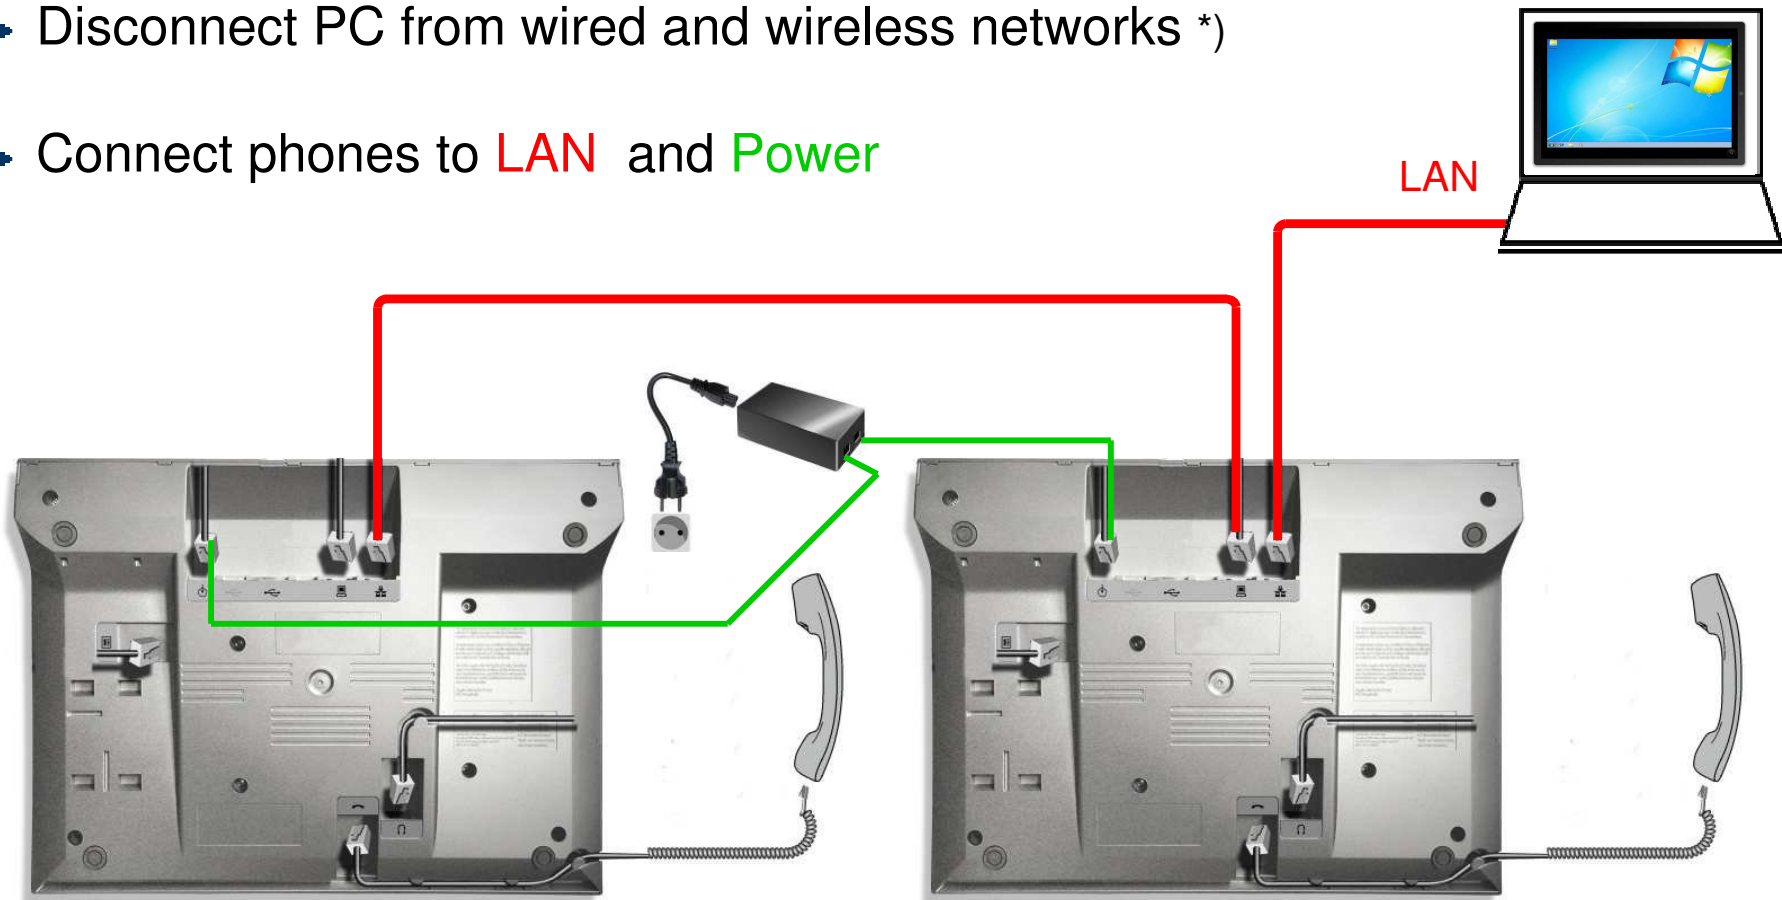


\*) The Demo SW needs and sets up its own IP network!

## Step 3


## Start virtual OpenScape Office LX

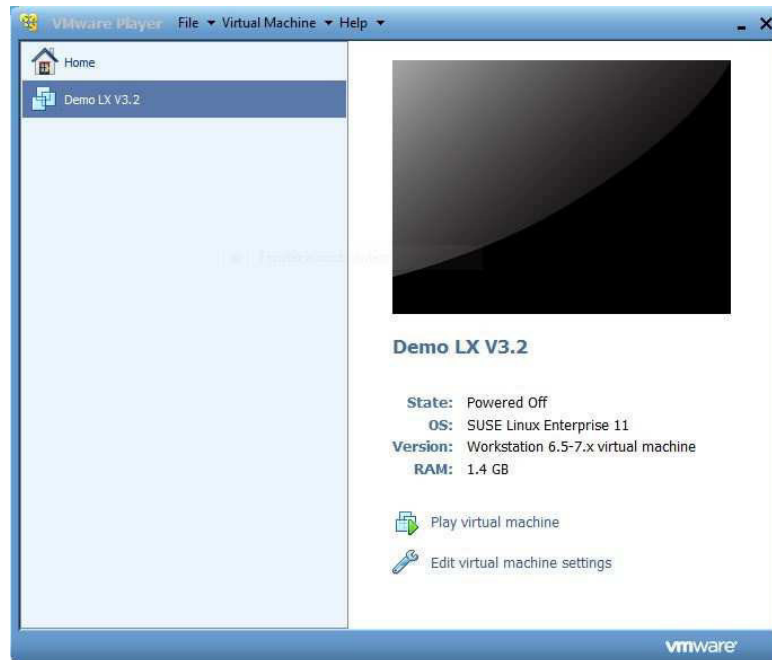

### Start VMware Player on your PC

- ▶ Select  **Open a Virtual Machine**  
Open an existing virtual machine, which will then be added to the top of your library.
- ▶ Select **LX.vmx** from installation folder
- ▶ Select  **Play virtual machine**
- ▶ Select **I moved it** from pop up

First start needs up to 10 minutes  
Status **green** is shown after login  
with user **sen** and password **linux**





## Step 4a

### Prepare Phones



*If your phones were already in use:*

- ▶ Log on as administrator

Menu > Settings > Administrator  
Password: **123456** (default)



- ▶ Make a factory reset

> Maintenance > Factory Reset  
Reset password: **124816**



## Step 4b

# Configure Phones



### After fresh start:

- ▶ Enter terminal number **100**, press ok  
Save & exit, press ok


Phone restarts and logs on


- ▶ Enable PC port  
Network > Port configuration >  
Number > PC port status > Enabled  
Save & exit > press ok


Follow the same procedure for the second phone with number **101**

## Step 5

## Install OpenScape Office Clients

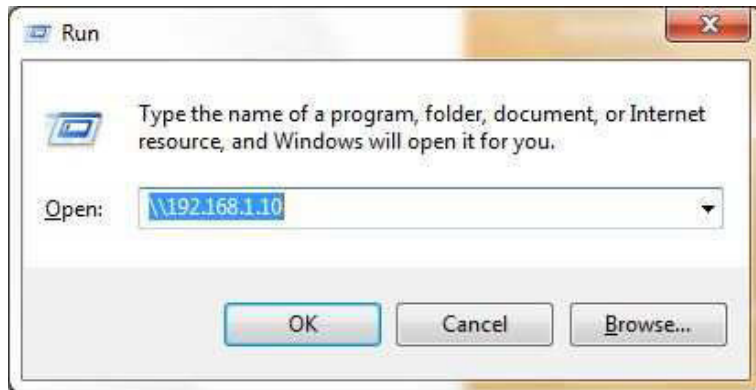

- ▶  Run \\192.168.1.10
- ▶ Open folder applications
- ▶ Enter user **hooome** password **hoomesw**
- ▶ Open folder **install-common**
- ▶ Execute **CommunicationsClients.exe**
- ▶ Finish installation as usual
- ▶ Login to myPortal with
  - User **100 / 101**
  - Password **123098**
  - Server **192.168.1.10**



Note:

No clients for other OpenScape Office systems should be installed at the PC

# OpenScape Office V3 LX Demo Capabilities

SIEMENS

**Task completed !**

**You have now a fully functional OpenScape Office LX with permanent licenses:**

- 3 \* Comfort Plus users
  - 2 \* Outlook integration
  - 1 \* Attendant Console
  - 2 \* CC Agents, CC Fax, CC E-mail
  - one additional CSTA link
- 
- The demo is already preconfigured with users, mailboxes, favorites and a small Contact Center. For further details see:



Demo DVD  
Installation Guide

Note:

For OpenScape Web Collaboration a Demo License for a separate Windows Server is available.

# OpenScape Office V3 LX Demo

## What to show?



### Convince your Customers by showing the UC Highlights **Live**

- **myPortal for Outlook** and **myPortal for Desktop** – managing daily communication from a single and familiar PC user interface.
- **myPortal for Mobile / Tablet** – show the web-based and browser independent User Interface. Access to the most important UC features from everywhere.
- **myAttendant** – have the perfect overview and always know who is available or not.
- **myAgent** and **integrated Contact Center** – show how “state of the art” call routing helps improving your customer service.
- **Presence Management and Favorite Bar** – always know, if your colleagues and team members are available, get status based personal announcements.
- **Drag & Drop Conferencing** – just start an “ad hoc” or “scheduled” conference by a mouse click.
- **Visible Voicemail and Fax** – listen to the most important Voicemail or Fax message first.

## About Unify

Unify is one of the world's leading communications software and services firms, providing integrated communications solutions for approximately 75 percent of the Fortune Global 500. Our solutions unify multiple networks, devices and applications into one easy-to-use platform that allows teams to engage in rich and meaningful conversations. The result is a transformation of how the enterprise communicates and collaborates that amplifies collective effort, energizes the business, and enhances business performance. Unify has a strong heritage of product reliability, innovation, open standards and security.

**Unify.com**

Copyright © Unify Software and Solutions GmbH & Co. KG 2015  
Mies-van-der-Rohe-Str. 6, 80807 Munich/Germany  
All rights reserved.

The information provided in this document contains merely general descriptions or characteristics of performance which in case of actual use do not always apply as described or which may change as a result of further development of the products. An obligation to provide the respective characteristics shall only exist if expressly agreed in the terms of contract.

Availability and technical specifications are subject to change without notice.

Unify, OpenScape, OpenStage and HiPath are registered trademarks of Unify Software and Solutions GmbH & Co. KG. All other company, brand, product and service names are trademarks or registered trademarks of their respective holders.

**UNIFY** Harmonize  
your enterprise