


SIP V1R6 Feature Overview

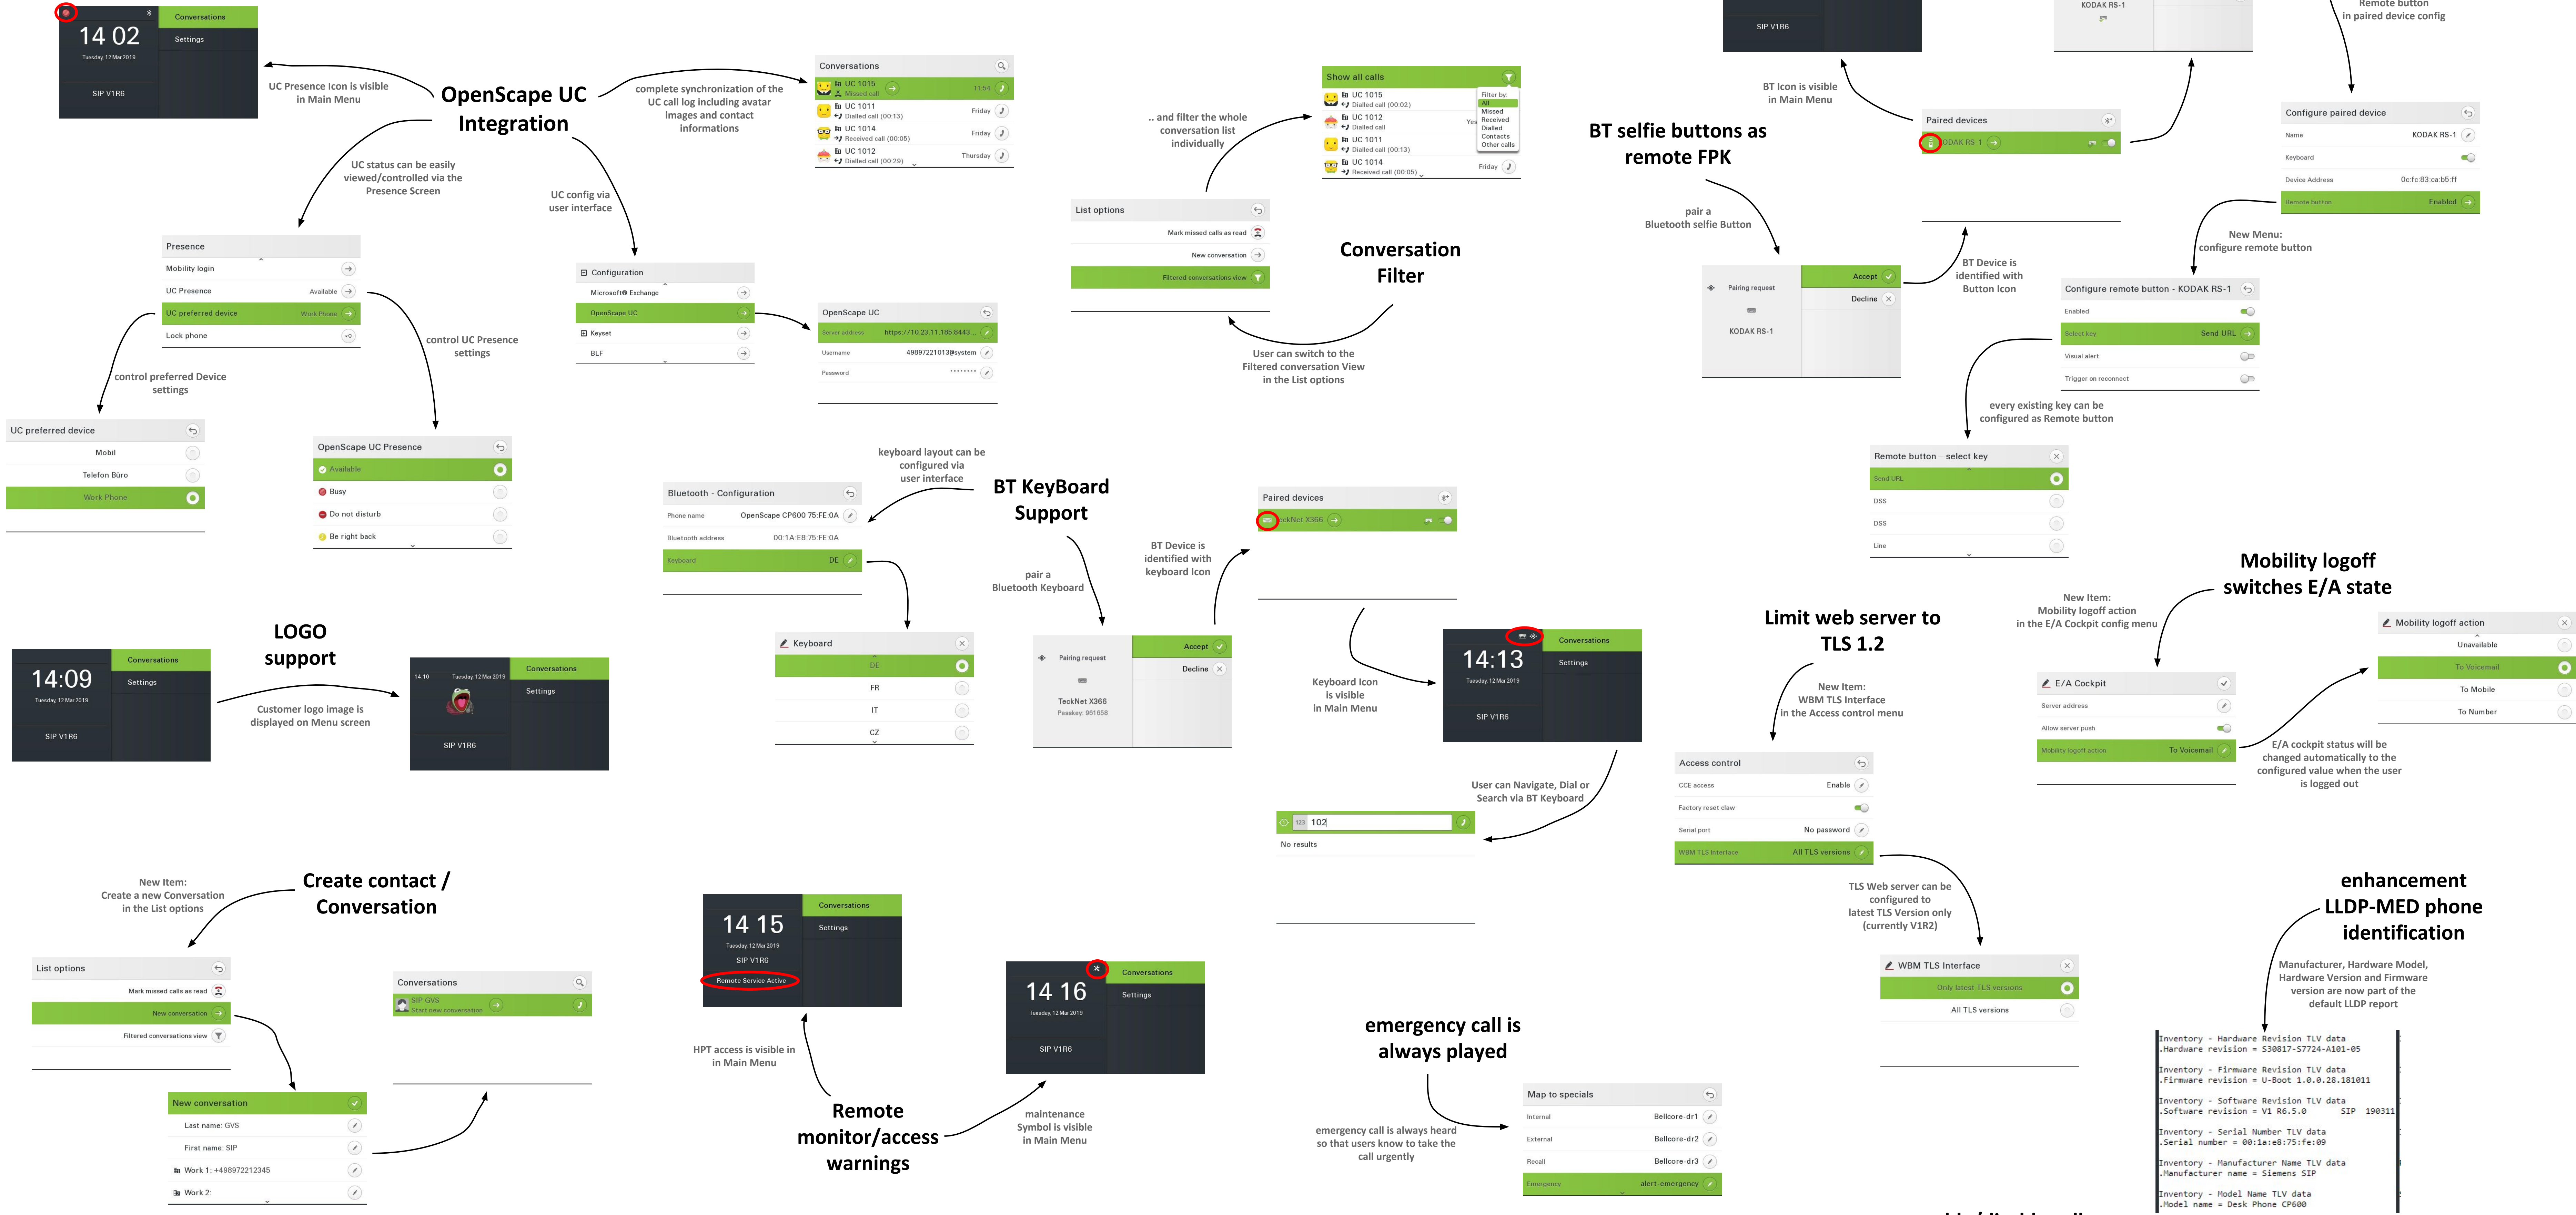

- OpenScape UC**
- Local conversations are no longer displayed in UC Mode
 - Local conversations are deleted if you deactivate UC Mode
 - UC is the Master Source for conversation in UC mode
- How to configure UC mode:
WBM/Local: User→Configuration→OpenScape UC
DLS: IP Devices→IP Phone Configuration→Service Integrations→UC Connection
 Min DLS Version : V7R3.507.00
- config matrix:
 Server: https://<Server IP>:<Server Port> (default UC port: 8443)
 Username : UC Username
 Password : UC Password
- Logo**
- There can only one single logo image on the phone
 - When a new logo image is uploaded, the old one is deleted
- Supported logo Image Format:
 CP600 : PNG image with 24-bit with alpha / 220 x 70
 CP400 : BMP image format / 112 x 32
 Max file size: 10 MB
- How to upload logo:
WBM: Admin→File Transfer→WBM Upload option is displayed as a sub-section on top of FTP/HTTPS
DLS: Identical handling like OpenStage (File transfer)
- How to delete logo:
WBM: select "delete logo file" as "After Submit" option and press the "Submit" Button
DLS: Identical handling like OpenStage (File transfer)
- Limit web server to TLS 1.2**
- When the phone is configured for "only latest Version" the WBM Server will NOT allow a HTTPS connection to be negotiated down to an obsolete Version (like TLS 1.0 or 1.1)
 - When the phone is configured for "All TLS versions" the WBM Server will allow a HTTPS connection to be negotiated down to an obsolete Version but will prefer the latest Version possible.
- WBM/Local:** Admin→System→Security→Access control
DLS: IP Devices→Security Settings→Enabled Services (NW Stack)
 Min DLS Version : V7 R3.509.00
- Mobility logoff switches E/A state**
- WBM/Local:** Admin→System→Registration→E/A Cockpit
DLS: IP Devices→IP Phone Configuration→Service Integrations→E/A Cockpit
 Min DLS Version : V7R3.507.00
- Remote monitor/access warnings**
- The following remote activity's are affected:
- SSH Access
 - HPT Observe & Control
 - Remote Tracing
- BT selfie buttons as remote FPK**
- If the CP phone is configured to play a key click for "All keys" then the phone will play the key click tone, at the configured volume
 - BT device needs to support the HID Profile
 - parallel usage of selfie Button and Keyboard is not possible
 - There can be only one Keyboard HID device connected at the same time
- BT Keyboard Support**
- If the CP phone is configured to play a key click then the phone will play the key click tone, at the configured volume
 - BT device needs to support the HID Profile
 - parallel usage of selfie Button and Keyboard is not possible
 - There can be only one Keyboard HID device connected at the same time
- Favorites keys on Landing Page**
- no FPKs available on the main menu screen when a KM is attached
 - the first FK's are visible (currently up to 2)
 - the configured (and static) label of the FPK is visible
 - Key reflect the LED status of the FPK like Favorites menu
 - Pressing the SRK/OK will trigger the same action as pressing the SRK from within the Favorites menu
 - NO status/action icon or alternating Text will be shown

- emergency call is always played**
- emergency call is always heard so that users know to take the call urgently
- Map to specials**
- | | |
|-----------|-----------------|
| Internal | Belloire-dr1 |
| External | Belloire-dr2 |
| Recall | Belloire-dr3 |
| Emergency | aler1-emergency |
- enable/disable call waiting tone**
- user can disable the tone played on an alerting call waiting call
- New Item:** Allow call waiting tone in the Handling menu
- Favorites keys on Landing Page**
- top keys from the Favorites screen are visible in the unused menu options of the Main menu screen
- MOB Symbol**
- new Icon in status bar when MOB user is logged in
- enhancement LLDP-MED phone identification**
- Manufacturer, Hardware Model, Hardware Version and Firmware version are now part of the default LLDP report
- ```
Inventory - Hardware Revision TLV data
:Hardware revision = S30817-57724-4101-05
Inventory - Firmware Revision TLV data
:Firmware revision = U-Boot 1.0.0.28.181011
Inventory - Software Revision TLV data
:Software revision = V1 R6.5.0 SIP 190311
Inventory - Serial Number TLV data
:Serial number = 00:1a:e8:75:fe:09
Inventory - Manufacturer Name TLV data
:Manufacturer name = Siemens SIP
Inventory - Model Name TLV data
:Model name = Desk Phone CP600
```