

User Interface

Programmable Keys



Your phone has three programmable function keys, shown on the left with default configuration.



Fixed Function Keys




4-Way-Navigator




- Cancel function, delete characters left of the cursor, step up one menu level
- Scroll upwards
Hold down: Jump to top of list
- Confirm input, perform action or step down one menu level
- Scroll downwards
Hold down: Jump to the end of list

Audio keys

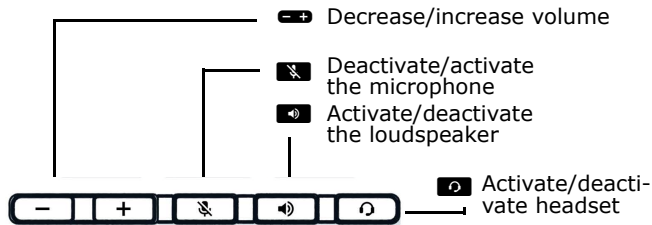

Key Pad Shortcuts

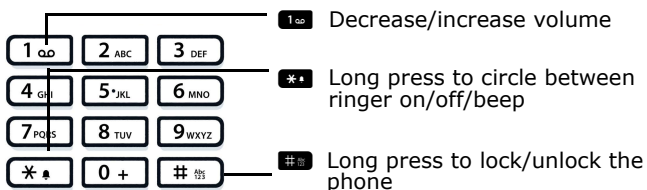

Notification LED

With the Notification LED different phone status can be identified:




- Off: Idle
- Red solid: Active call
- Red quick pulsing: Incoming call
- Red quick pulsing: Call(s) on hold

Notification on the display

The display of the status label will be controlled by the state of the key.
Line or function key can be pulsing or inverted similar to



	<p>ENERGY STAR is a U.S. Environmental Protection Agency voluntary program that helps businesses and individuals save money and protect our climate through superior energy efficiency. Products that earn the ENERGY STAR prevent greenhouse gas emissions by meeting strict energy efficiency criteria or requirements set by the U.S. Environmental Protection Agency. Learn more at energystar.gov. Unify is an ENERGY STAR partner participating in the ENERGY STAR program for Enterprise Servers and Telephony. The Unify product OpenScape Desk Phone CP110 has earned the ENERGY STAR.</p>
---	--



Atos Unify OpenScape Desk Phone CP110

Atos Unify OpenScape Business
HFA

Quick Reference Card




Using your OpenScape Desk Phone CP110


Place a Call

- Lift handset, dial number or
- Dial number and lift handset or
- For handsfree mode: dial number.

Answer a Call


- Lift handset or
- for handsfree mode: press .

End a Call


- Hang up, or
- For handsfree mode: press .

Open listening

During a call with handset:


- Press .

Switch off open listening:

- Press .

Switch between Handset and Handsfree Mode

Switch to handsfree mode during a Call:

- Hold down  until you hang up handset.

Switch to handset:

- Lift handset.

Hold and Retrieve a Call



During a call with Party A:

- Press Hold key (if configured). Party A is put on hold.
- To retrieve a held call: press Retrieve line (if configured).

Using your OpenScape Desk Phone CP110

Consultation





During a call with Party A:

1. Press . Party A is put on hold.
2. Call Party B.
3. If the conversation with Party B is finished, press  or wait, until Party B has hang up.

You are now connected again to Party A.


Toggle

During a call with Party A:

1. Press . Party A is put on hold.
2. Call Party B.
3. If connected to Party B, press  and  to toggle. Pressing  repeatedly toggles between Party A and B.

Make a Conference Call


During a call with Party A:

1. Press . Party A is put on hold.
2. Call Party B.
3. If connected to Party B, choose option Start conference on the display.

You are now in a conference call with Party A and B.

Transfer a Call

During a call with Party A:


1. Press . Party A is put on hold.
2. Call Party B.
3. If connected to Party B, choose option Start transfer on the display. Alternatively, the call can be transferred without consultation (blind transfer).

The party A will be transferred to Party B.

Call back

1. Call an internal Party. The Party does not lift the handset or is busy.
2. Press Callback on the Programmable key (if configured).
3. As soon as the not reached Party has hung up, the callback is triggered and your telephone rings.
4. Answer the call back. The not reached Party is called.

Programmable keys



Your phone has three programmable function keys, shown on the left with default configuration.



Examples of Programmable keys

Function	Explanation
Call waiting	Allows a second incoming call while in an active call
Callback	Requests an automatic call back (busy/no answer)
Caller list	List of placed, answered and missed calls
Call forwarding	Forwards all incoming calls to the programmed destination when the line is busy
Call forward. no reply	Forwards all incoming calls to the programmed destination if they are not answered
Consult	Puts an active call on hold and provides a prompt for dialing
Pickup - directed	Picks up another ringing phone
Phonebook	Phonebook
Do not disturb	Incoming calls do not ring; callers hear the busy signal
Toggle/connect	Toggles OpenScape Voice services
Redial	Calls the last dialed number
Release	Ends a call
Redial key	Dials pre-defined numbers and control sequences